D voicevideocallChat Speed dial buttons Panasonic

Mobility Easy call Attendant

erencing Pickup

nat Calling line


Unified _{Call} communic

> Operation of buttons with indication of occupancy for quick dialing of telephones Panasonic KX-HDV230, KXHDV330 a KX-HDV430



Assembling and connecting the extension panel - Panasonic KX-HDV230, KX-HDV330 and KX-HDV430 phones only

In the package with the speed dial panel, you will find the **KX-HDV20** panel itself, a cable to connect to the **KX-HDV230** / **KX-HDV330** / **KX-HDV430** telephone, a stand for the panel and a set for screwing. Screw the plastic element from this set from the bottom of the phone into the prepared holes using the included screws, and similarly from the bottom of the panel. The connection to the phone is made with the included cable to the "**Ext**" socket on the phone side, and "**Ext in**" on the panel side. If you are going to connect more panels, use the "**Ext out**" and "**Ext in**" sockets to connect them. Assembling the individual panels together is the same as assembling the telephone – 1st panel. If more modules will be used (max. 6), the power supply must be connected to module No. 2 (in the direction from the phone).

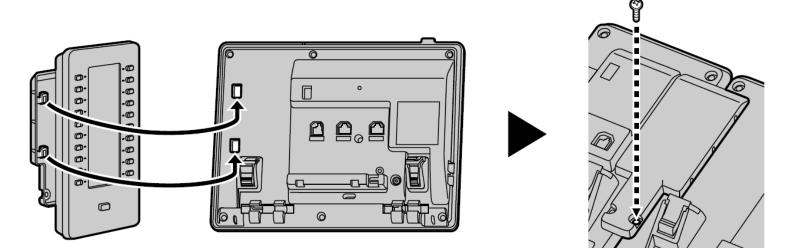



Panasonic

HD voiceVideocallChat anasonic

ual_{Calling line} Desktop communicator Iboration Mobility Easy call Attendant

[§]Communicator[®]

for tablet 📲 🔤 🕹 Unified Call form

communications Programmable buttons

13

ā


=

ت rding

ay conferencing Pickup Paralell ringing Chat Calling line vay conferencing Pickup

Assignment of lines to LCD panel buttons

After logging into the portal-uc.gtsce.com the portal. in "Options" field under "Client applications" -> "Field with busy indicator". In the search field, enter the desired number (first name, last name), that you want to add to the list for speed dial buttons. If you leave the field blank, all numbers will be displayed. Use the add (all) or remove (all) buttons to add/remove these numbers to/from the speed dial list. Their order can then be changed with the move up and move down buttons.

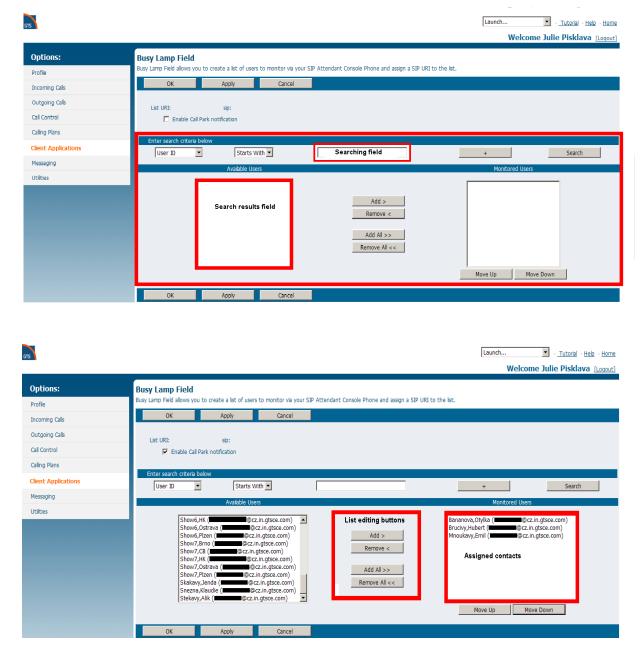



Panasonic