


Komunikátor pro tablet
Sjednocená komunikace
Obsazenosti linky
Telefonní lista
Nevyrušovat
Video hovory
Chat
Sdílené pracovní místo
Jednací místnost
Jednoduché volání

Aplikace
Sdílení
Zákaznický portál
Mobilita
Obsazenosti linky
Presence Chat
HD hlas
Presence Chat

Panasonic KX-HDV130

Before you start

Package content: **Telephone set, Handset, Wires, Telephone Stand and Screws for Wall mounting.** Insert the telephone stand into four holes on the underside of the telephone set (so that the telephone can stand on the desk). In case of installation on the wall, use two large screws to mount the unit and a small one to attach the adapter to the unit. Attach one end of the handset cord to the handset and the other end to the socket on the telephone marked with handset. Attach the **LAN** cable (black cable) to the socket on the underside of the telephone marked **"Internet"** and attach the other end of this cable to internet modem, router or switch. If the Managed LAN service is used, the telephone and the PC can be connected in cascade. Attach the Managed LAN switch cable to the socket on the underside of the telephone marked „LAN“ and attach the LAN cable from the PC to the socket marked „PC“. If your network does not support PoE (Power on Ethernet), it is

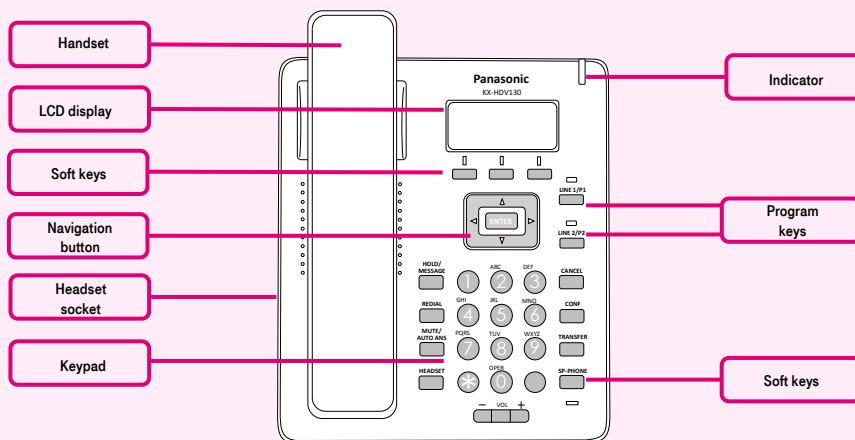

necessary to use a power adapter (an optional accessory). The first launch of the phone can take several minutes, during which the phone is updated, and eventually reboot itself. Please do not disconnect it from the power. After the phone is registered to the network, the date, time and your telephone number appears. Everything is ready and you can start making calls.

Right in the telephone a list of telephone contacts has been made ready for you to use, which is updated once a day. You may find here the call history – **received, dialed and missed calls**. For additional settings use the web page <https://hlas.t-mobile.cz/>. To sign in, use the **username** and **password** you received at the handover.

1. Making a Call

Lift the handset or press the **"SP-PHONE"** (Loudspeaker mode is activated) or **"HEADSET"** (when using the Headset) and enter the required telephone number using the numeric keypad. During a call, you can deactivate the microphone by pressing **"MUTE"**.

2. Speed Dial

To set up the speed dialling, press and hold (0-9) button. Press **"Menu"** and select **"Edit"**, enter the contact name and then the phone number. Then it is possible to select **"Auto Call"**, the phone number is dialled on prolonged holding, or **"Manual"**, the phone number is dialled while pressing the **"SP-PHONE"** button or **"HEADSET"** (when using the Headset).

3. Telephone Directory

Within the Virtual PBX service there are three different telephone directories: **Enterprise, Enterprise-Common and Personal**. Corporate

directory contains all active users of the company, external numbers cannot be saved here (e.g. employee mobile numbers or external partner telephone numbers). All users have it read-only.

Into the **Enterprise-Common** directory any number can be saved. For its administration it is necessary to log in to the <https://hlas.t-mobile.cz/> portal as an administrator of a company or branch. All other users have it read-only.

Personal directory is intended for user private contacts, is available on all user devices and **UC-One** application. Administration (adding, editing or deleting items) can be done via the <https://hlas.t-mobile.cz/> portal.

4. Searching in Telephone Directory

An item in the telephone directory can be searched by entering a name: Press the status button **"Tel. Directory"**, and then select the type of the directory and confirm by **"OK"**. Enter the name or the first letters of that name and confirm **"OK"**. In T9 mode just press the

key once, the phone searches for all the items corresponding the letters below the key. This method is significantly faster. Select the required item and press **"OK"**. Select the required telephone number and press the **"SP-PHONE"** button or lift the handset to make a call. Switching between the insert modes can be done by clicking the right status button.

5. Call Register

Press the **"Calls"**, hot key. Then choose whether to view missed calls, incoming or outgoing calls. Click **"OK"** to confirm. Consequently go through the list using the up/down arrows. If you want to call the selected telephone number, press **"SP-PHONE"**, or **"HEADSET"** or just lift the handset.

6. Redial

To dial the dialled number press the **"REDIAL"** button.



